

TORQUE LIMITER

CA-TYPE AUTOMATIC CLUTCH



The COMPACT automatic clutch offers a level of implement overload protection not possible with other types of clutches. The compact, efficient design disconnects the power source from the drivetrain when overload occurs, and does not reconnect until the speed is reduced. During disengagement, the patented design minimizes damaging torque spikes and heat.


PERFORMANCE BENEFITS

- Repeatable overload protection
- MINIMAL TORQUE SPIKES WHEN DISENGAGED
- MINIMAL HEAT GENERATION
- Maintenance-free clutch
- AUDIBLE OPERATOR NOTIFICATION
- TAMPER-PROOF
- VARIOUS RE-ENGAGEMENT SPEED OPTIONS
- VARIOUS RE-ENGAGEMENT TORQUE OPTIONS
- COMPACT 4.00 in. (102 mm) DIAMETER
- DESIGN OFFERED WITH DRIVE SHAFT OR THROUGH-SHAFT OPTIONS

Quality fits. Every time.



TORQUE LIMITER

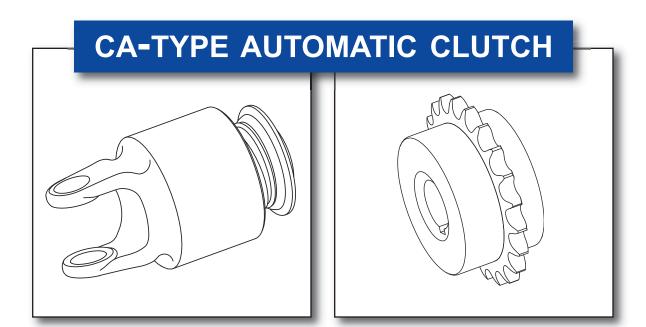

DESIGN FEATURES -

- DRIVE WEDGES AND RING
 - EFFICIENT OVERLOAD PROTECTION IS ATTAINED BY TRANSFERRING THE AXIAL SPRING FORCE INTO TORSIONAL POWER (PATENTED)
 - WEAR RESISTANT DESIGN ENSURES REPEATABLE PROTECTION

Spring

- THE DESIGN ALLOWS THE CLUTCH TO SPIN WITH MINIMAL LOAD WHILE DISENGAGED, MINIMIZING DAMAGING TORQUE SPIKES AND HEAT GENERATION (PATENTED)
- TORQUE PROTECTION LEVEL IS DETERMINED BY SPRING SELECTION AND VERIFIED FOR EACH ASSEMBLY
- THE COMPACT DESIGN AND LOW MASS MINIMIZE BEARING OVERHUNG LOAD
- AVAILABLE IN EITHER DRIVE SHAFT OR THROUGH-SHAFT CONFIGURATIONS
- AUTO-LOK ATTACHMENT AVAILABLE (PATENTED)
- TORQUE SETTING AVAILABLE FROM 1000 TO 8850 in lb (100 TO 1000 Nm)
- SPEEDS TO 1000 RPM