



Weasler®

TRACTOR YOKE

DESIGN FEATURES

- Interchangeable with all other Weasler yokes and standard yokes available in the market.
- Through bore keeps debris from collecting inside.
- Cast iron collar, not plastic.
- Spring covered by collar to avoid damage.
- Compound radius locking pawls fit the contour of the tractor shaft groove.

Auto-Lok Yoke



PATENTED

Never before has the connection of a PTO drive shaft been so easy! The unique design of the Auto-Lok yoke allows the operator to use both hands to maneuver the shaft into the correct position.

PERFORMANCE BENEFITS

- TEMPORARILY LOCKING THE COLLAR IN RELEASED POSITION BOTH HANDS ARE FREE TO HOLD THE WEIGHT.
- COLLAR AUTOMATICALLY LOCKING ONTO SPLINED SHAFT ALLOWS BOTH HANDS TO SUPPORT THE WEIGHT AND INDICATES THE YOKE IS PROPERLY MOUNTED ON THE TRACTOR PTO SHAFT.
- HIGH THRUST CAPACITY DUE TO UNIQUE PAWL DESIGN LEADS TO LESS SHAFT DAMAGE ENSURING IT IS ALWAYS EASIER TO CONNECT OR DISCONNECT.

Higher Value · Smarter Solutions



Weasler®

TRACTOR YOKE

MANUFACTURING LOCATIONS

WEASLER ENGINEERING, INC.
P.O. Box 558
West Bend, Wisconsin, 53095 USA
Tel: +1 (262) 338 2161
Email: oesales@weasler.com

WEASLER ENGINEERING TURKEY
Power Packer Turkey
Akhisar Organize Sanayii Bolgesi 5.
Cadde No: 33
Akhisar Manisa 45230
Turkey
Tel: +31 (0)24 64 89 100
Email: sales@weasler.nl

WEASLER ENGINEERING KFT
P.O. Box 262, H6001,
Kecskemet, Hungary
Tel: +31 (0)24 64 89 100
Email: sales@weasler.nl


WEASLER ENGINEERING BRASIL
Turotest Medidores Ltda.
Ave Luiz Merenda, 489 - Campanário,
Diadema - SP, 09931-390
Brasil
Tel: +55 (11) 40927204
Email: info.sa@weasler.com

Auto-Lok Yoke



PATENTED

TEMPORARILY LOCKING COLLAR IN RELEASED POSITION - AUTOMATICALLY LOCKS ONTO SPLINE SHAFT

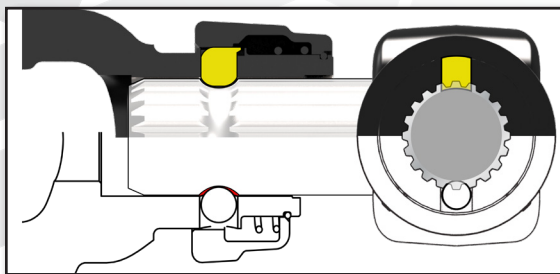

Unique pawl design with a compound radius to perfectly fit contour of groove compared to ball bearing



Interchangeable with all other Weasler yokes and standard yokes available in the market

WE0101004-0817

For more information see our website: www.weasler.com